



ADVANCES IN THE DEVELOPMENT OF GIS TOOLS FOR THE EVALUATION OF SEISMIC RISK

Miguel Estrada

1) Associate Professor, Faculty of Civil Engineering, National University of Engineering, Peru
estrada@uni.edu.pe

Abstract: To evaluate the seismic vulnerability of an urban area it is necessary to know the type of buildings or the actual land use over it. The development of building inventory is costly and time consuming, therefore, in Peru only few municipalities may have the capacity to develop such a kind of work. In this paper it is discussed the use of high resolution images to infer the type of social class and consequently the type of house or building typified by its major characteristics, based on two characteristics: the number of pools and the concentration of vegetation that exist in each block of the area under study.

1. INTRODUCTION

Peru is located in a seismic prone area and the development of the cities are so fast and do not pay attention to the regulation on building constructions, so it is of interest to study the type of building on urban area to know their vulnerability in case of an extreme earthquake. One of the main data source to assess the type and condition of the building are the census or inventory data that is developed for the local governments. In most of the municipalities in Peru there is not a policy to develop this kind of data, not only because of lack of economic resources but also because the absence of technical people that can understand the problem and conduct this work. Therefore it is necessary to develop a methodology to carry out a fast inventory of buildings and to recognize their vulnerability against earthquakes. Recently high resolution imagery is becoming more accessible, not only because price, but also because multiple satellites are observing the earth surface constantly given a rich source on information about the land use. Lima city is characterized by people of different social classes; these social classes may indicate the type of building where they live, in terms of quality and if they followed the regulations during the construction of the building. Low class people generally they construct their houses by themselves, as they can and without following the regulations of the National Building Code.

In this study it is proposed to used high resolution satellite imagery to recognize the social class of the people by identify some characteristics of their houses like pools and greenness and thus to classify the vulnerability of the urban area. Finally the land information is integrated with PRISM sensor data to identify areas that are built over important slope to evaluate also hazard of these area.

2. UMBRELLA PROJECT

This research is under the project “Enhancement of Earthquake and Tsunami Disaster Mitigation Technology in Peru” the purpose of this project is to developed technologies and measures for prediction and mitigation of earthquake/tsunami disasters caused by large-magnitude inter-plate earthquakes occurring off the coast of Peru.

This project is divided into five active groups. Group 1 will research on seismology and geotechnical issues, and give the final response of the soils. Group 2, will study the source, effects and countermeasures of tsunamis produced by an earthquake. Group 3, will identify the most typical building problems and will propose retrofitting methods or will give some advises to improve the actual building code. Group 4, will develop methodologies to identify the land use, by using the satellite imagery and integrating all the information in a GIS platform to assess the risk of the building as well as to develop a methodology for fast assessment of the damaged area by an earthquake or tsunami. Finally, Group 5 will take the entire group’s output and will disseminate this knowledge and propose policies for a sustainable development of the population. This project is under the support of Japan International Cooperation Agency, Japan Science and Technology Agency, Peruvian International Cooperation Agency. And the institutions directly involved in this study are the Chiba University and Tokyo Institute of Technology, from the Japanese side and the Japan Peru Center for Earthquake Engineering Research and Disaster Mitigation, National University of Engineering, from the Peru side.

3. STUDY AREA

The area of study is the district of La Molina in Lima Peru. This district has a population of approximately 130000 inhabitants. This district is very special in Lima Metropolitan area, because here it can be found people of different social classes and therefore different construction type and building quality. Another issue in this district is that it is growing very fast and the new developed urban area is taking place on terrain with important slope. Because soil conditions, buildings in this district have suffered of important damage in past earthquakes, therefore it is important to know the type of building that are built on this area. In Figure 1 it can be seen the location and extension of La Molina district, that is located in the middle east of Lima. Although this is a district with relatively good economical resources, the situation of the cadastral information is still in the beginning stage that is why it is necessary to use another source of information to evaluate and assess the type of buildings.

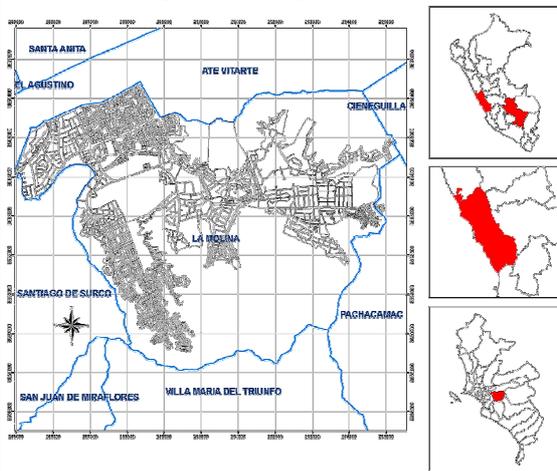


Figure 1. District of La Molina in Lima, Peru.

4. DATA CHARACTERISTICS

The data used in this work is the multispectral Worldview 2 which major characteristics are shown in Table 1.

Table 1. Worldview 2 scene characteristics.

Characteristic	Value
Acquisition date	March 11, 2010
Number of bands (M – P)	8 – 1
Rows/Columns (M – P)	4031/5463 – 16124/21852
Bits per pixel	16
Spatial resolution	2.0 m MS/0.5 m PAN
Wavelength (nm):	
- Coastal (Band 1)	- 427 nm
- Blue (Band 2)	- 478 nm
- Green (Band 3)	- 546 nm
- Yellow (Band 4)	- 608 nm
- Red (Band 5)	- 659 nm
- Red edge (Band 6)	- 724 nm
- NIR 1 (Band 7)	- 831 nm
- NIR 2 (Band 8)	- 908 nm

As we can see in Table 1 the number of multispectral bands that are included in one image is good enough to detect many materials over the earth surface. This advantage is taken as the base for the analysis. In this research Worldview 2 images were selected instead of Ikonos (Cook et al., 2000) images because two reasons: first: there is a better resolution 0.50 m vs. 0.60 m, and second spectral resolution in case of Worldview 2 has more sensibility as it can be seen in Figure 2.

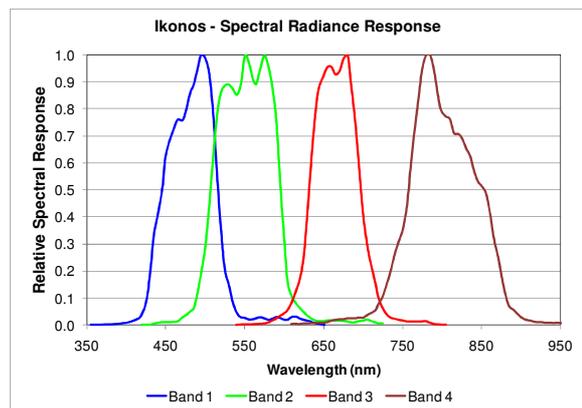
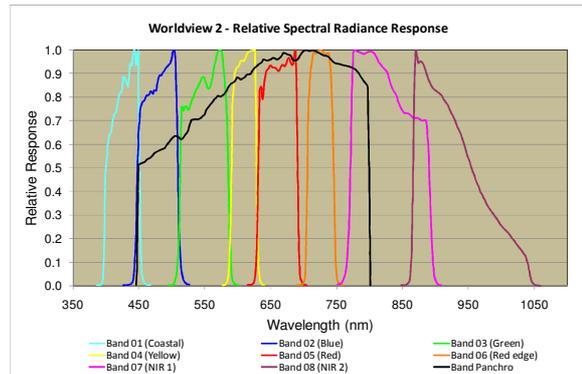


Figure 2. Spectral response comparison between Worldview 2 and Ikonos images.

5. METHODS AND PROCEDURES

To assess the seismic vulnerability of an urban area can be done by evaluating of housing census data, but it has the drawback that that method cannot be generalized, one approach based on contextual analysis of image and GIS data is presented by Ebert et al (2008) where an approach based on proxy variables that were derived from high resolution optical and laser scanning data was applied, in combination with elevation information and existing hazard data social class we investigate the location of swimming pool within an urban area. Another approach for building inventory is presented by Dutta et. al (2005) where very high resolution satellite optical data from Quickbird satellite with object-oriented classification scheme was used for an overall accuracy of 85% in detailed classification of urban land cover.

In La Molina district it can be found different types of land use depending on the social classes. As it is shown in Figure 3, high social class area (a) has an important green area and important features are the pools inside of the lot, middle class area (b) has also important green area but no pools, and low class area has few vegetation and no pools. Therefore if pools and vegetation can be detected in an automatic manner we could infer the type of social class in the area and as consequence the social vulnerability of it.

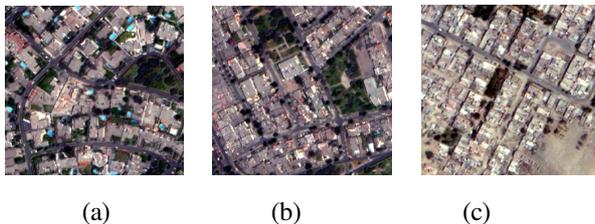


Figure 3. Difference between land use in La Molina.

For image classification exits a bunch of methods, mainly classified into two big groups: unsupervised and supervised methods. One of the methods of supervised classification is described by Mohd et. al. (2007) the Spectral Angle Mapper (SAM) this is a physically-based spectral classification that uses an n-dimensional angle to match pixels to training pixel area. The algorithm determines the spectral similarity between two spectra by calculating the angle between them, treating them as vectors in a space with axes equal to the number of bands. Smaller angles represent closer matches to the training pixels.

Luc et. al. (2005) depicts how to obtain the angle between two spectra that are being compared. In Figure 4 it can be seen, in a three bands dimension space, if spectral angle (θ) is small then the tested (t) and reference (r) spectral vectors are similar. In **¡Error! No se encuentra el origen de la referencia.**, we can see the numerical calculation, where the angle θ is a kind of correlation value between two samples in an n-dimensional spectral space.

¡Error! No se encuentra el origen de la referencia.




Figure 4. r reference spectra vector, t spectra vector to be compared, θ spectral angle .

Pixels that are in pools are selected as trained pixels. Pixels were selected over the image, and their spectral response was analyzed. Figure 5, shows how the pixels were selected and the average of the digital number of these pixels.

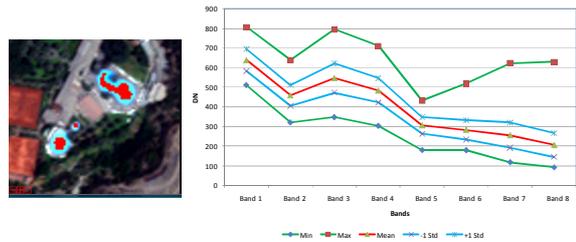


Figure 5. Trained pixels and their spectral response.

Another parameter that was used is the NDVI to detect the concentration of vegetation in the area.

6. RESULTS

The SAM method for classification gave good results and the pools could be detected, the number of pools in one block where automatically counted and the image was transferred to GIS map and then classified by this number.

Additionally, the NDVI also was calculated and the number of pixels that represent vegetation where counted in each block.

Figure 6 shows the thematic map considering the number of pools by block, it can be seen that there are some areas where the number of pools is considerable given areas of high class. In Figure 7, is presented the thematic map representing the concentration of vegetation in each block, high concentration of vegetation indicates high class, while very low concentration may indicate low class.

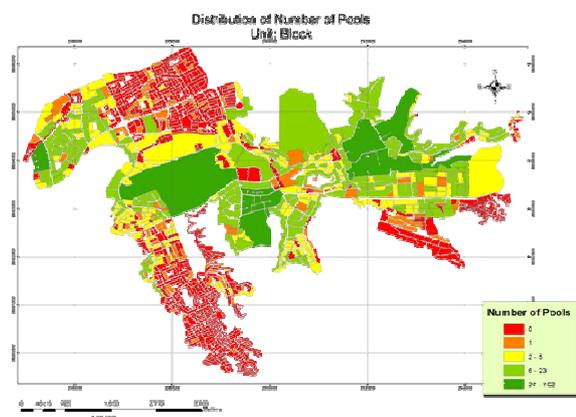


Figure 6. Classified map indicating the number of pools by block.

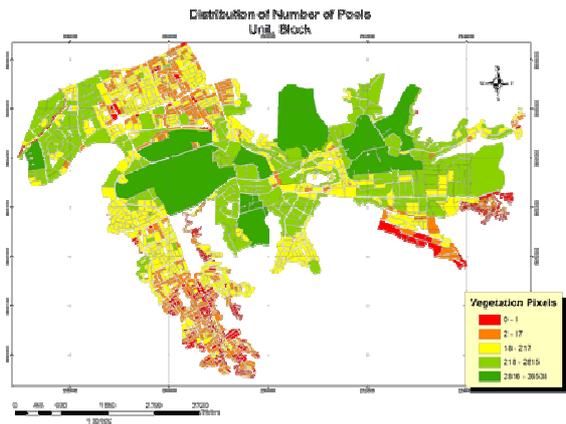


Figure 7. Classified map indicating the number of vegetation pixels by block.

Also it was conducted a field survey for verification of the results given good agreement with the two indexes. In Figure 8, it can be seen that for different type of land use it is possible to correlate the number of pools and the NVDI.



Figure 8. Field survey of different sectors.

3. CONCLUSIONS

It can be shown that from satellite information it can be inferred the type of social class based on two characteristics of the urban area: the number of pools and the concentration of vegetation. While the number of pools and the concentration of vegetation is high it is indicative that the social class of the people who live there is high and therefore their houses may be well constructed, while on the other side where pools do not exist and the vegetated area is minor may indicate a social class where the construction of

the houses may have not follow the standards and therefore their seismic vulnerability could be considerable.

Acknowledgements:

The authors would like to thank to the Japan Science and Technology Agency and Japan International Cooperation Agency for the support in acquiring the satellite data and the field survey.

References:

- Cook, M., Peterson, B., Dial, G., Gerlach, F., Hutchins, K., Kudola, R. and Bowen, H., (2000), "IKONOS Technical Performance Assessment", Space Imaging, LLC.
- Dutta, D., Serker, K. and Warnitchai, P., (2005), "Use of VHR Remote Sensing Imagery for Urban Building and Infrastructure Inventory Database for Disaster Risk Analysis", Map India 2005, Geomatics 2005.
- Ebert, A., Kerle, N. and Stein, A. (2008), "Urban social vulnerability assessment with physical proxies and spatial metrics derived from air- and spaceborne imagery and GIS data", Nat Hazards 48:275–294.
- Luc, B., Deronde, B., Kempeneers, P., Debruyne, W. and Provoost, S. (2005), "Optimized Spectral Angle Mapper classification of spatially heterogeneous dynamic dune vegetation, a case study along the Belgian coastline", The 9th International Symposium on Physical Measurements and Signatures in Remote Sensing, Beijing.
- Mohd, H., Suhaili, A. and Mansor, S. (2007), "The Performance of Maximum Likelihood, Spectral Angle Mapper, Neural Network and Decision Tree Classifiers in Hyperspectral Image Analysis", Journal of Computer Science 3 (6): 419-423.